




KLP, INC.
 LIGHTNING PROTECTION SYSTEMS
 PROTECTING LIVES AND PROPERTY
 406-745-3800, PH 406-745-3820, FAX

www.kuefler-lightning.com
 kuefler@kuefler-lightning.com

P.O. BOX 209
 ST. IGNATIUS, MT
 59865

AIR TERMINAL (Conductor Connection) PIPE BASES

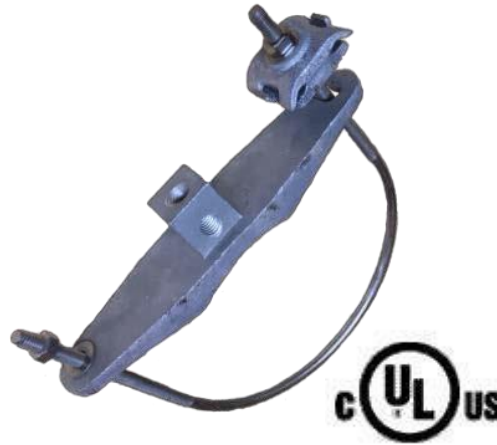

Air Terminal U-bolt pipe base with a lightning conductor connection, for use with pipes.
 Stainless-Steel Hex Nuts have Anti-Seize Technology plating to prevent galling.

X3: Pipe Range 1.90" to 3.00"

Pipe O.D. Range	Fits Iron Pipe Size	AT: Thread Size	ALUMINUM Part Number	BRONZE Part Number	TINNED BRONZE Part Number
1.90" - 3.00"	1-1/2" - 2-1/2"	3/8"	---	C258X338CH	C258X338CHT
1.90" - 3.00"	1-1/2" - 2-1/2"	1/2"	A258X312CH	C258X312CH	C258X312CHT
1.90" - 3.00"	1-1/2" - 2-1/2"	5/8"	A258X358CH	C258X358CH	C258X358CHT

X4: Pipe Range 2.75" to 4.25"

Pipe O.D. Range	Fits Iron Pipe Size	AT: Thread Size	ALUMINUM Part Number	BRONZE Part Number	TINNED BRONZE Part Number
2.75" - 4.25"	2.00" - 4.00"	3/8"	---	C258X438CH	C258X438CHT
2.75" - 4.25"	2.00" - 4.00"	1/2"	A258X412CH	C258X412CH	C258X412CHT
2.75" - 4.25"	2.00" - 4.00"	5/8"	A258X458CH	C258X458CH	C258X458CHT




KLP, INC.
 LIGHTNING PROTECTION SYSTEMS
 PROTECTING LIVES AND PROPERTY
 406-745-3800, PH 406-745-3820, FAX

www.kuefler-lightning.com
 kuefler@kuefler-lightning.com

P.O. BOX 209
 ST. IGNATIUS, MT
 59865

AIR TERMINAL (Conductor Connection) PIPE BASES (Continued)

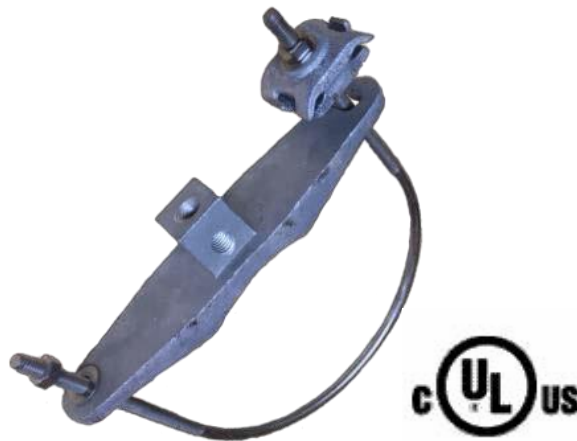

X6: Pipe Range 4.25" to 6.625"

Pipe O.D. Range	Fits Iron Pipe Size	AT: Thread Size	ALUMINUM Part Number	BRONZE Part Number	TINNED BRONZE Part Number
4.25" - 6.625"	4.00" - 6.00"	3/8"	---	C258X638CH	C258X638CHT
4.25" - 6.625"	4.00" - 6.00"	1/2"	A258X612CH	C258X612CH	C258X612T
4.25" - 6.625"	4.00" - 6.00"	5/8"	A258X658CH	C258X658CH	C258X658T

X8: Pipe Range 6.00" to 8.625"

Pipe O.D. Range	Fits Iron Pipe Size	AT: Thread Size	ALUMINUM Part Number	BRONZE Part Number	TINNED BRONZE Part Number
6.00" - 8.625"	6.00" - 8.00"	3/8"	---	C258X838CH	C258X838CHT
6.00" - 8.625"	6.00" - 8.00"	1/2"	A258X812CH	C258X812CH	C258X812CHT
6.00" - 8.25"	6.00" - 8.00"	5/8"	A258X858CH	C258X858CH	C258X858CHT