
kuefler@kuefler-lightning.com

P.O. BOX 209 ST. IGNATIUS, MT 59865



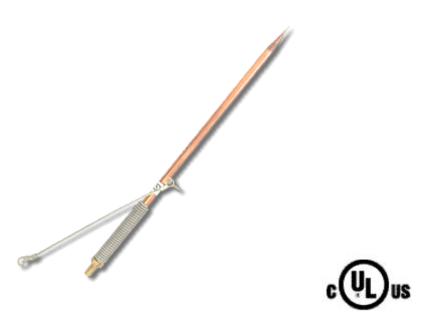

Spring Loaded Air Terminals are used where movable equipment, such as window washing equipment, interferes with Fixed Air Terminals. Also used in mid roof areas, for safety, where Air Terminals could be subject to breakage. Easily retrofit to existing Lightning Protection Systems.

1/2" DIAMETER	COPPER - Class I or II Part Number			
AT LENGTH (IN)	BARE COPPER Pointed	NICKEL Pointed	BARE COPPER Safety Tip	NICKEL Safety Tip
10"	C1210SPL	C1210NSPL	C1210STSPL	C1210NSTSPL
12"	C1212SPL	C1212NSPL	C1212STSPL	C1212NSTSPL
18"	C1218SPL	C1218NSPL	C1218STSPL	C1218NSTSPL
24"	C1224SPL	C1224NSPL	C1224STSPL	C1224NSTSPL